


Name: Sam Gibbons
Date: _____
Track: Pendle STD MBX6

Track Conditions

Size: Open Med. Tight
 Traction: High Med. Low
 Surface: Smooth Med. Bumpy

Front Suspension

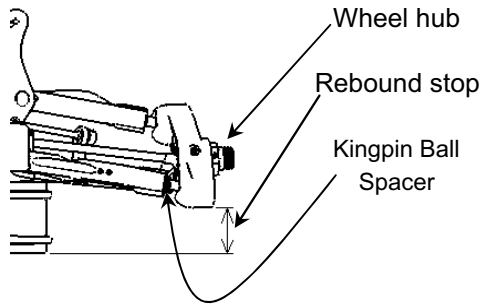


Front Ride Height
 Kingpin ball spacer 1 mm
 Camber angle 2 °
 Upper arm spacer 2 mm
 Toe angle 2 °
 Rebound stop max mm
 Anti-roll bar \varnothing 2.4 mm
 Wheel Hub std mm
 Lower arm mount (Kick up) 0 1



Lower arm plate (E0154A)


Upper arm position (E0148B, E0148C)

Lower arm spacer 0 mm

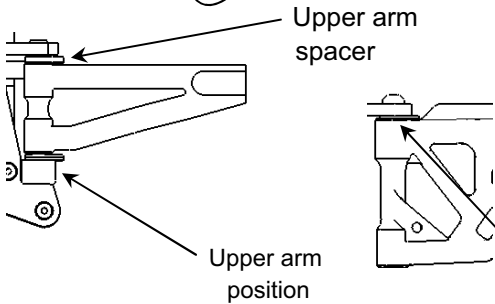


Front Shocks


Piston std
 Oil #50W
 Spring 9.25T
 Spring adjustment _____ mm




Shock position



Steering Ackerman



Rear Suspension

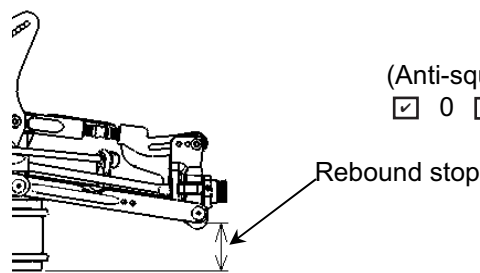


Rear Ride Height
 Camber angle 4 °
 Lower arm mount (Anti-squat) 0 1 (Toe angle) 2.75 °
 Rebound stop max mm
 Anti-roll bar \varnothing 2.8 mm
 Anti-squat (E0111C, E0111D)




Upright E0152 E0173(Aluminium)

Wheelbase adjustment 2 mm

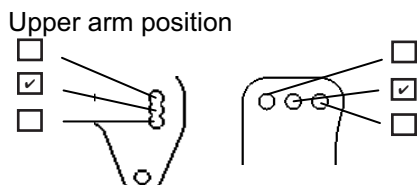


Upright pin position

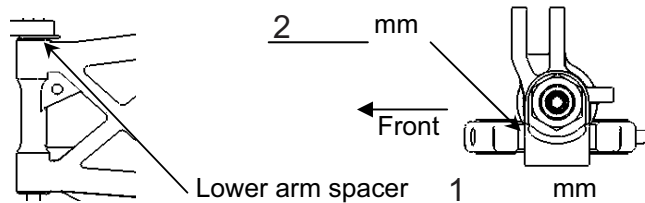


Lower arm spacer 1 mm

Rear Shocks


Piston std
 Oil #40W
 Spring 10.25T
 Spring adjustment _____ mm



Shock position



Wing Position



Engine Type RB WS7
 Gasket _____ mm Reducer \varnothing 7mm
 Plug std Fuel DC+25%
 Muffler RS2047

Diff. Oil
 Front # 15 O-Ring _____ pcs. Other _____
 Center # 10 _____ pcs. Other _____
 Rear # 5 _____ pcs. Other _____

Tire

Front

Type Tourex X300
 Foam STD

Rear

Type Tourex X300
 Foam STD

Clutch

Clutch shoes Aluminium _____ Other rmv black
 Spring 3x1.1 mm
 Clutch bell / Spur gear 14T / 46T

Result

Race time / Lap _____
 Best lap (1Lap) _____

Comments:

Underdriven rear gearing, wishbones level, dual rate 90%